Document No: B825/826 Edition: 2

 Date:
 2020-03-09

 Page:
 1(2)

 Prepared:
 AP

 Approved:
 MS

ALO Center AB Industrivägen 10 SE-792 32 Mora Sweden +46 250 94900 info@alocenter.se

www.alocenter.se



ALO 825

ALO 825

Electrical driven loop table



Designed to maintain an automatically controlled loop of band being fed into ALO's setting machines. The unit has a pair of pneumatically compressed feed wheels that are driven by a frequency controlled AC motor. The two wheel drive system ensures that the band have no slipping problems.

For best result, use the option 825-Brush to clean the saw blades from burrs and dirt before, for example, an ALO setting machine.



OPTION:

825-BRUSH: Brush cleaning unit for the band

TECHNICAL SPECIFICATION:

Band width: 12 - 100 mm
Band thickness: 0.4 - 1.6 mm

Weight: 110 Kg

Air pressure: 6.3 bar 91 psi


Voltage: 400VAC ±10%, 3-phase, 50 – 60 Hz ± 1%

Space requirement (LxWxH): 1200 x 1200 x 1250 mm



ALO 826

Mechanical brake unit

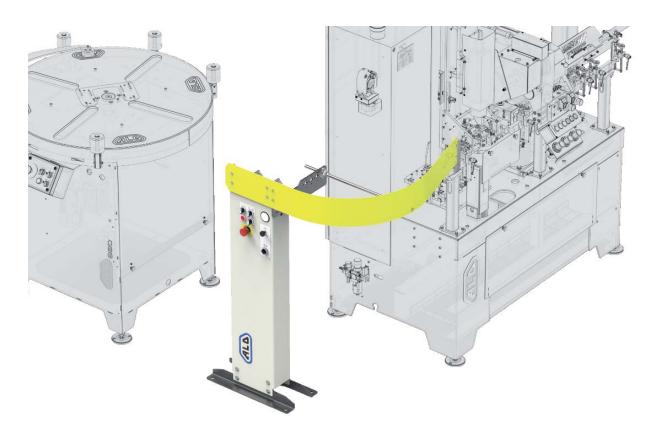

ALO 826

826 is a non-powered brake unit intended to work together with a take-up system, for example, ALO 880, ALO 863-HD or 106-ESD and is designed to maintain a constant tension of the band blade between 826 and the take-up system.

TECHNICAL SPECIFICATION:

Band width: 12 - 100 mm Band thickness: 0.4 - 1.6 mm

Weight: 50 Kg

Air pressure: 6.3 bar 91 psi

Voltage: $400VAC \pm 10\%$, 3-phase, $50 - 60 Hz \pm 1\%$

Space requirement (LxWxH): 1000 x 1000 x 1225 mm

 ϵ

SWEDISH QUALITY
WITH RESPECT FOR THE
ENVIRONMENT AND
SAFETY REGULATIONS